


eStruxture | TOR-5 Data Center

The highly secure, modern TOR-5 data center provides the perfect combination of hybrid cloud and colocation solutions, with flexible options for business continuity and disaster recovery. Built to exceed Tier III standards, our 60,000 sq. ft. TOR-5 facility is ideally located within 100 kilometers of downtown Toronto and is perfectly suited for customers seeking choice for fully managed primary and secondary colocation services.



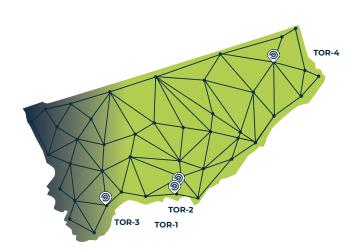

eStruxture TOR-5 is a carrier-neutral facility that features enterprise-class infrastructure with power redundancy, biometric access control, 24x7x365 monitoring, video surveillance and security. TOR-5 features enterprise-class infrastructure with a variety of connectivity options to ensure always-on connectivity.

| Tier III Design | Ideal Disaster Recovery Site | | Maximum Scalability and Flexibility |

KEY FACTS

ADDRESS

612 Welham Road Barrie, ON L4N 8Z8 Lat: 44.33788 | Long: -79.66991

SITE OVERVIEW

- 60,000 sq. ft.



BUILDING DETAILS

- 24/7/365 video surveilance and monitoring
- Controlled perimeter access barrier with secured free parking
- Connected to power grid different than Toronto
- Customers' lounge, amenities, and conference rooms available



POWER AND INFRASTRUCTURE

- 10 MW total power capacity
- UTI Tier III certified by design
- Minimum N+1 on all components



CONNECTIVITY

- Cloud and carrier neutral
- 11 Carriers
- Fiber diversity and redundancy available on-site
- Directly connect to all major clouds including AWS, Google Cloud, Azure and Oracle Cloud







TOR-5 DC SPECIFICATIONS

BUILDING AND LAND SPECIFICATIONS		SECURITY	
60,000 sq. ft. of total space 30,000 sq. ft. of white space	PERIMETER	24/7/365 Data Center staff Security vestibule Controlled perimeter access barrier 80 ft. Perimeter setback distance	
Three Data Halls and 10 MW total power capacity	VIDEO	Advanced video surveillance, minimum 90 days of video retention	
Building 2004 First data hall built in 2013	ON-SITE STAFFING	24/7/365	
Single floor, single tenant purpose build Data Center	ACCESS	24/7/365 Access for registered customers, card access with secondary biometric authentication, multiple zone security access	
375 lbs. / sq. ft.	MANTRAPS	Yes	
22' 0"	CONNECTIVITY		
Outside 100 year floodplain Outside 500 year floodplain	MEET-ME-ROOM	Two Meet-Me-Rooms	
Dedicated loading bay	CONNECTIVITY	Network neutral with access to 11 carriers Fibers' path diversity and entrance redundancy available	
Yes	IP SERVICES	Blended IP Bandwidth	
POWER FIBER CROSS CONNECTS Yes		Yes	
Single incoming utility feed with block redundant electrical distribution to data hall	COPPER CROSS CONNECTS	Yes	
Alectra Utilities Corporation	ENVIRONMENTAL CONTROLS		
Single feed	COOLING DISTRIBUTION	Rooftop units w/ manifold ducting and closed chiller loop Hot aisle containment or passive exhaust chimneys	
Up to 17 kW / rack upon request	COOLING CAPACITY	Total 3000 RT	
N+1 and 2N	REDUNDANCY	N+1	
N+1	DESIGN	Free-cooling optimization mode provides efficient and eco-friendly cooling while improving colocation sustainability	
72 Hours			
	CERTIFICATIONS / COMPLIANCES		
Photoelectric and VESDA systems	SOC 2 Type II, ISO 27001, PCI DSS Certification v3.2.1		
VictaulicVortex (DH1 / DH2 Only) and Double Interlock Pre-Action Dry Pipe			
	60,000 sq. ft. of total space 30,000 sq. ft. of white space Three Data Halls and 10 MW total power capacity Building 2004 First data hall built in 2013 Single floor, single tenant purpose build Data Center 375 lbs. / sq. ft. 22' 0" Outside 100 year floodplain Outside 500 year floodplain Dedicated loading bay Yes Single incoming utility feed with block redundant electrical distribution to data hall Alectra Utilities Corporation Single feed Up to 17 kW / rack upon request N+1 and 2N N+1 72 Hours Photoelectric and VESDA systems VictaulicVortex (DH1 / DH2 Only)	60,000 sq. ft. of total space 30,000 sq. ft. of white space Three Data Halls and 10 MW total power capacity Building 2004 First data hall built in 2013 Single floor, single tenant purpose build Data Center 375 lbs. / sq. ft. MANTRAPS 22' 0' CONNECTIVITY Outside 100 year floodplain Outside 500 year floodplain Outside 500 year floodplain Dedicated loading bay CONNECTIVITY Yes IP SERVICES FIBER CROSS CONNECTS Single incoming utility feed with block redundant electrical distribution to data hall Alectra Utilities Corporation ENVIRONMENTAL Single feed COOLING DISTRIBUTION Up to 17 kW / rack upon request COOLING CAPACITY N+1 and 2N REDUNDANCY Photoelectric and VESDA systems VictaulicVortex (DH1/ DH2 Only)	











